

The control system is equipped with a peak enable circuit to manage peak flows and excess water use event. If the water level rises enough to overcome the "peak enable" (third) float and the peak enable selector switch is on, the system will be cycled at the peak rate. The system will continue to cycle at an increased rate until the peak enable float is deactivated at which time the system will resume the normal dosing cycle.

In the event the water level continues to rise enough to overcome the "High Level" (fourth) float, the audio/visual alarm will be activated until silenced by pressing the Test-Normal-Silence switch to the silence position. The alarm circuit must be reset when the "High Level" float returns to its normal position

DRIP SYSTEM PACKAGE SPECIFICATION

CONTROL

The control has a Nema 4X rated enclosure with hinged inner door, removable aluminum back plate for component mounting, IEC rated pump contactor, adjustable pump run timer, high level peak enable circuit, Hand-Off-Auto toggle switches for all operations, pump run light, indicator lights, separate control and pump breakers, control fuse, and finger-safe terminal blocks with a neatly bundled wiring harness. The Control unit is U.L. APPROVED AND LABELED. The microprocessor has manual override capability to completely operate the system while bypassing the microprocessor.




TUBING and FIELD FITTINGS

Netafim Ram tubing in 1,000 feet rolls with specialty insert fittings and PVC flex tubing is provided ready to glue to schedule 40 PVC supply & return pipes.

**HYDRAULIC UNIT (HU)
w/INSULATED ENCLOSURE**

The hydraulic unit is mounted on an aluminum skid, heated, and enclosed in an at grade polyethylene insulated valve box with bolt down cover. The Control valves and heater are pre-wired with a 15' cord suitable for connection to the control terminal strips.

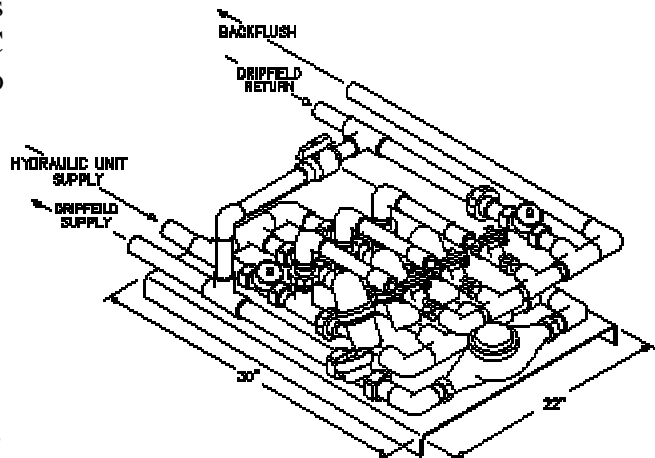


HYDRAULIC UNIT, MODEL 30
NTE

SUBMERSIBLE PUMP

The pump is a 2 hp, 230-volt, 1 phase septic effluent pump with 1/2" solids handling capacity. Available also is a 1/2 hp, 115 volt, 1 phase screened effluent pump with quick disconnect at reduced cost.

PUMP DISCHARGE KIT & FLOAT ROD W/FLOATS

Included in package is a shut off valve, quick disconnect, check valve, and adapters, no weep hole should be placed in pipe. Vertical float installation is recommended as shown.

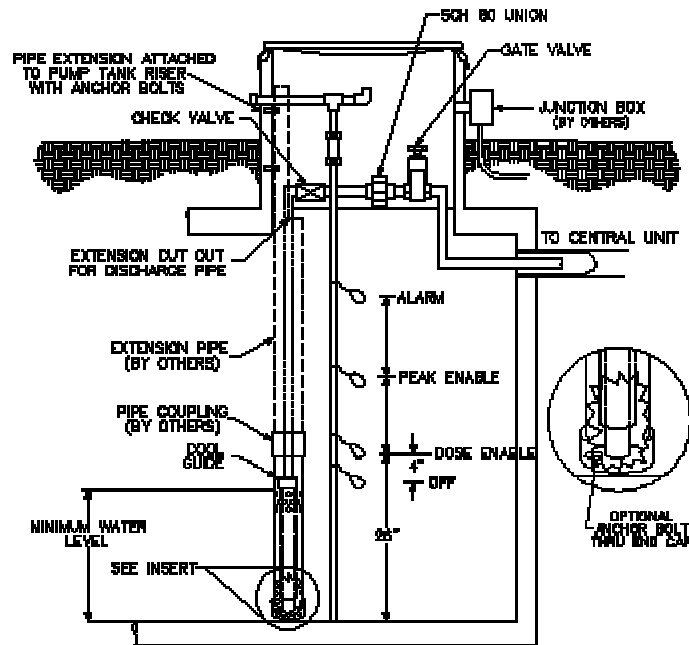

Copyright © , American Manufacturing Company, Inc., 2000