

# AMERICAN ONSITE PRODUCTS

## PERC-RITE® DRIP PUMPS

### EFFLUENT PUMP

#### Model Series: PUTURB15

#### FEATURES


- ◆ **Non-Metallic Parts are Effluent Compliant:** Impellers, diffusers constructed of glass filled polycarbonate or Noryl, engineered composites. Both materials are corrosion resistant.
- ◆ **Bearing Discharge Head:** State of the art engineered composite material for superior strength and corrosion resistance. Loop for safety line molded into head.
- ◆ **Warranted for one year** against failure due to workmanship and materials.
- ◆ **Stainless Steel Casing:** Polished stainless steel is attractive and durable in the most corrosive effluent.
- ◆ **Hex Shaft Design:** Six sided shafts for positive impeller drive.
- ◆ **Inlet Strainer:** Molded suction strainer built into motor adapter.

TDH for Backflushing  
Most Limiting Condition

- ◆ **Motor:**
  - Built-in surge arrestor is provided on single-phase motors.
  - Stainless steel splined shaft.
  - Hermetically sealed windings.
  - Replaceable motor lead assembly.
  - UL 778 and CSA recognized.
  - NEMA mounting dimensions.
- ◆ **Standard 100" jacketed power cord.**
- ◆ **Agency Listings:** All complete pump/motor assemblies are UL778 and CSA listed. All Franklin Electric Motors are UL778 recognized.

Model Series	Flow Range GPM	Horsepower Range	Best Eff. GPM	Discharge Connection	Maximum Solids Size	Rotation
PUTURB15122W	6 - 28	½	18	1 ¼	1/16" dia.	CCW

## PERC-RITE® PUMP PUTURB15

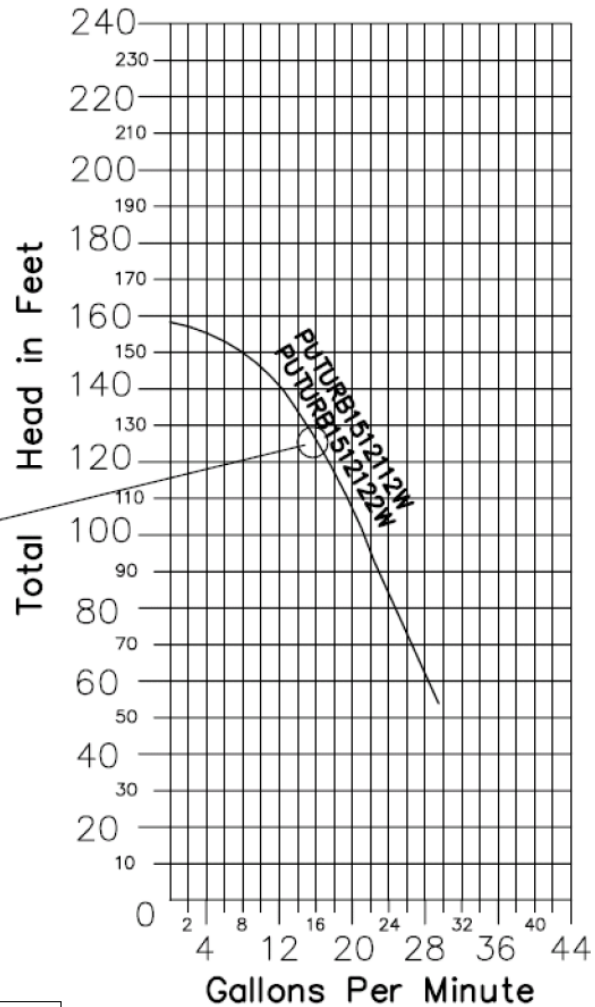

DESIGNERS GUIDE PUMP CURVE  
DRIP DISPERSAL SYSTEM